

Verifying Termination of General Logic Programs with Concrete Queries

Yi-Dong Shen*

Department of Computer Science, Chongqing University, Chongqing 400044, China

Email: ydshen@cs.ualberta.ca

Li-Yan Yuan and Jia-Huai You

Department of Computing Science, University of Alberta, Edmonton, Canada T6G 2H1

Email: {yuan, you}@cs.ualberta.ca

Abstract

We introduce a method of verifying termination of logic programs with respect to concrete queries (instead of abstract query patterns). A necessary and sufficient condition is established and an algorithm for automatic verification is developed. In contrast to existing query pattern-based approaches, our method has the following features: (1) It applies to all general logic programs with non-floundering queries. (2) It is very easy to automate because it does not need to search for a level mapping or a model, nor does it need to compute an interargument relation based on additional mode or type information. (3) It bridges termination analysis with loop checking, the two problems that have been studied separately in the past despite their close technical relation with each other.

Keywords: Logic programming, termination analysis, loop checking, automatic verification.

1 Introduction

For a program in any computer language, in addition to having to be logically correct, it should be terminating. Due to the recursive nature of logic programming, however, a logic program may more likely be non-terminating than a procedural program. Termination of logic programs then becomes one of the most important topics in logic programming research. Because the problem is extremely hard (undecidable in general), it has been considered as a *never-ending story*; see [12, 15] for a comprehensive survey.

*Current corresponding address: Department of Computing Science, University of Alberta, Edmonton, AB, Canada T6G 2H1. Email: ydshen@cs.ualberta.ca

The goal of termination analysis is to establish a characterization of termination of a logic program and design algorithms for automatic verification. A lot of methods for termination analysis have been proposed in the last decade (e.g., see [1, 2, 6, 13, 15, 17, 19, 22, 30, 31, 43, 45]). A majority of these existing methods are the *norm-* or *level mapping-based* approaches, which consist of inferring mode/type information, inferring norms/level mappings, inferring models/interargument relations, and verifying some well-founded conditions (constraints). For example, Ullman and Van Gelder [43] and Plümer [30, 31] focused on establishing a decrease in term size of some recursive calls based on interargument relations; Apt, Bezem and Pedreschi [1, 2], and Bossi, Cocco and Fabris [6] provided characterizations of Prolog left-termination based on level mappings/norms and models; Verschaetse [46], Decorte, De Schreye and Fabris [16], and Martin, King and Soper [28] exploited inferring norms/level mappings from mode and type information; De Schreye and Verschaetse [13], Brodsky and Sagiv [7], and Lindenstrauss and Sagiv [23] discussed automatic inference of interargument/size relations; De Schreye, Verschaetse and Bruynooghe [14], and Mesnard [29] addressed automatic verification of the well-founded constraints. Very recently, Decorte, De Schreye and Vandecasteele [15] presented an elegant unified termination analysis that integrates all the above components to produce a set of constraints that, when solved, yields a termination proof.

It is easy to see that the above methods have among others the following features.

1. They are compile-time approaches in the sense that they make termination analysis only relying on some *static* information about the structure (of the source code) of a logic program, such as modes/types, norms (i.e. term sizes of atoms of clauses)/level mappings, models/interargument relations, and the like.
2. They are suitable for termination analysis with respect to (abstract) query patterns [14]. A query pattern defines a class of concrete queries,¹ such as ground queries, bounded queries, well-moded queries, etc.

Our observation shows that some *dynamic* information about the structure of a concrete infinite SLDNF-derivation, such as *repetition* of selected subgoals and clauses and *recursive increase* in term size, plays a crucial role in characterizing the termination. Such dynamic features are hard to capture unless we evaluate some related concrete queries. This suggests that methods of extracting and utilizing dynamic features for termination analysis should be exploited.

Another observation comes from real programming practices. Consider the following situation: Given a logic program P and a query pattern Q , applying a termination analysis yields a conclusion that P is not terminating w.r.t. Q . In most cases, this means that there are a handful of concrete queries of the pattern Q evaluating which

¹The difference between an abstract query pattern and a concrete query is similar to that between a class and an object in object-oriented programming languages.

may lead to infinite SLDNF-derivations. In order to improve the program, users (programmers) most often want to figure out how the non-termination happens by posing a few typical concrete queries and evaluating them step by step while determining which derivations would most likely extend to infinite ones. Such a debugging process is both quite time consuming and tricky. Doing it automatically is of great significance. Obviously, the above mentioned termination analysis techniques cannot help with such job. This suggests that methods of termination analysis for concrete queries should be developed.

The above two observations motivated the research of this paper. In this paper, we introduce an effective method for termination analysis w.r.t. concrete queries. The basic idea is as follows: First, since non-termination is caused by an infinite (generalized) SLDNF-derivation, we directly make use of some essential structural characteristics of an infinite derivation (such as variants, expanded variants, etc.) to characterize the termination. Then, given a logic program and a set of concrete queries, we evaluate these queries while dynamically collecting and applying certain structural features to predict (based on the characterization) if we are on the track to an infinite derivation. Such a process of query evaluation is guaranteed to terminate by a necessary condition of an infinite derivation. Finally, we provide the user with either an answer *Yes*, meaning that the logic program is terminating w.r.t. the given set of queries, or a finite (generalized) SLDNF-derivation that would most likely lead to an infinite derivation. In the latter case, the user can improve the program following the guidance of the informative derivation.

Although the termination problem is undecidable in general, our method works effectively for a vast majority of general logic programs with non-floundering queries. In fact, the methodology used in this paper is partly borrowed from loop checking – another research topic in logic programming, which focuses on detecting and eliminating infinite loops in SLD-trees (e.g., see [3, 8, 26, 27, 35, 36, 37, 44, 48]). Therefore, our work bridges termination analysis with loop checking, the two problems which have been studied separately in the past despite their close technical relation with each other [12].

The plan of the paper is as follows. In Section 2, we introduce a notion of a generalized SLDNF-tree, which is the basis of our method. Roughly speaking, a generalized SLDNF-tree is a set of SLDNF-trees augmented with an ancestor-descendant relation on their subgoals. In Section 3, we prove a necessary and sufficient condition for an infinite generalized SLDNF-derivation. In Section 4.1, we formally define the notion of termination, which is slightly different from that of De Schreye and Decorte [12]. In Section 4.2, we develop an algorithm for automatically verifying termination of a general logic program with concrete queries and prove its properties. We will use some representative logic programs to illustrate the effectiveness of the algorithm. In Section 5, we mention some related work on termination analysis and on loop checking. We end in Section 6 with some concluding remarks and further work.

1.1 Preliminary

We present our notation and review some standard terminology of logic programs as described in [25].

Variables begin with a capital letter, and predicate, function and constant symbols with a lower case letter. Let A be an atom/function. The size of A , denoted $|A|$, is the count of function symbols, variables and constants in A . We use $rel(A)$ to refer to the predicate/function symbol of A , and use $A[i]$ to refer to the i -th argument of A , $A[i][j]$ to refer to the j -th argument of the i -th argument, and so on. Let S be a set or a list. We use $|S|$ to denote the number of elements in S .

Definition 1.1 Let A be an atom with the list $[X_1, \dots, X_m]$ of distinct variables. By *variable renaming* on A we mean to substitute the variables of A with another list $[Y_1, \dots, Y_m]$ of distinct variables. Two atoms A and B are said to be *variants* if after variable renaming (on A or B) they become the same.

For instance, let $A = p(a, X, Y, X)$ and $B = p(a, Z, Y, Z)$. By substituting $[X, Y]$ for $[Z, Y]$, B becomes the same as A , so A and B are variants. However, A and $C = p(a, Z, Y, W)$ are not variants because there is no variable substitution that makes them the same. Note that any atom A is a variant of itself.

Definition 1.2 A (general) *logic program* is a finite set of clauses of the form

$$A \leftarrow L_1, \dots, L_n$$

where A is an atom and L_i s are literals. A is called the *head* and $L_1, \dots, L_n$ is called the *body* of the clause. If a general logic program has no clause with negative literals in its body, it is called a *positive* program.

Definition 1.3 A *goal* is a headless clause $\leftarrow L_1, \dots, L_n$ where each literal L_i is called a *subgoal*. $L_1, \dots, L_n$ is called a (concrete) *query*. When $n = 0$, the “ $\leftarrow$ ” symbol is omitted.

The initial goal, $G_0 = \leftarrow L_1, \dots, L_n$, is called a *top* goal. Without loss of generality, we shall assume throughout the paper that a top goal consists only of one atom (i.e. $n = 1$ and L_1 is a positive literal).

Definition 1.4 A *control strategy* consists of two rules: one rule for selecting one goal from among a set of goals, and one rule for selecting one subgoal from the selected goal.

The second rule in a control strategy is usually called a *selection* or *computation* rule in the literature. Throughout the paper we use a fixed *depth-first, left-most* control strategy (as in Prolog). So the *selected* subgoal in each goal is the left-most subgoal.

Trees are commonly used to represent the search space of a top-down proof procedure. For convenience, a node in such a tree is represented by $N_i : G_i$ where N_i is the name of the node and G_i is a goal labeling the node. Assume no two nodes have the same name. Therefore, we can refer to nodes by their names.

2 Generalized SLDNF-Trees

Non-termination of general logic programs results from infinite derivations. In order to characterize infinite derivations more precisely, in this section we extend the standard SLDNF-trees [25] to include some new features.

To characterize an infinite derivation we need first to define the ancestor-descendant relation on its selected subgoals. Informally, A is an ancestor subgoal of B if the proof of A needs (or in other words goes via) the proof of B . For example, let $M : \leftarrow A, A_1, \dots, A_m$ be a node in an SLDNF-tree, and $N : \leftarrow B_1, \dots, B_n, A_1, \dots, A_m$ be a child node of M that is generated by resolving M on the subgoal A with a clause $A \leftarrow B_1, \dots, B_n$. Then A at M is an ancestor subgoal of all B_i s at N . However, such relationship does not exist between A at M and any A_j at N . It is easily seen that all B_i s at N inherit the ancestor subgoals of A at M .

The ancestor-descendant relation can be explicitly expressed using an *ancestor list* introduced in [36], which is a set of pairs $(Node, Atom)$ where $Node$ is the name of a node and $Atom$ is the selected subgoal at $Node$. The ancestor list of a subgoal L_j is $AL_{L_j} = \{(N_1, A_1), \dots, (N_k, A_k)\}$, showing that A_1 at node N_1 , ..., and A_k at node N_k are all ancestor subgoals of L_j . For instance, in the above example, if the ancestor list of the subgoal A at node M is AL_A then the ancestor list of each B_i at node N is $AL_{B_i} = \{(M, A)\} \cup AL_A$.

Augmenting SLDNF-trees with ancestor lists leads to the following definition of SLDNF*-trees.

Definition 2.1 (SLDNF*-trees) Let P be a general logic program, $G_0 = \leftarrow A_0$ a top goal, and R a depth-first, left-most control strategy. The *SLDNF*-tree* T_{G_0} for $P \cup \{G_0\}$ via R is defined as follows.

1. The root node is $N_0 : G_0$ with the ancestor list $AL_{A_0} = \{\}$ for A_0 .
2. Let $N_i : \leftarrow L_1, \dots, L_m$ be a node in the tree selected by R . If $m = 0$ then N_i is a *success* leaf, marked by $\square_t$. Otherwise, we distinguish between the following two cases.
 - (a) If L_1 is a positive literal, then for each clause $B \leftarrow B_1, \dots, B_n$ such that L_1 and B are unifiable, N_i has a child node
$$N_s : \leftarrow (B_1, \dots, B_n, L_2, \dots, L_m)\theta$$
where θ is an mgu (i.e. most general unifier) of L_1 and B , the ancestor list for each $B_k\theta$ is $AL_{B_k\theta} = \{(N_i, L_1)\} \cup AL_{L_1}$, and the ancestor list for each $L_k\theta$ is $AL_{L_k\theta} = AL_{L_k}$. If there exists no clause whose head can unify with L_1 then N_i has a single child node – a *failure* leaf, marked by $\square_f$.
 - (b) If $L_1 = \neg A$ is a ground negative literal, then build a partial SLDNF*-tree $T_{\leftarrow A}$ for $P \cup \{\leftarrow A\}$ via R where A inherits the ancestor list of L_1 , until the first success leaf is generated. If $T_{\leftarrow A}$ has a success leaf then N_i has

a single child node – a failure leaf, $\square_f$. Otherwise, if all branches of $T_{\leftarrow A}$ end with a failure leaf then N_i has a single child node

$$N_s : \leftarrow L_2, \dots, L_m$$

where all L_k inherit the ancestor lists of L_k at node N_i .

Note that in this paper we do not discuss floundering – a situation where a non-ground negative subgoal is selected by R (see [9, 18, 24, 32] for discussion on such topic). In contrast to SLDNF-trees, an SLDNF*-tree has the following two new features.

1. An ancestor list AL_{L_j} is attached to each subgoal L_j . In particular, subgoals of a subsidiary SLTNF*-tree $T_{\leftarrow A}$ built for solving a subgoal $L_1 = \neg A$ inherit the ancestor list of L_1 (see item 2b). This is especially useful in identifying infinite derivations across SLTNF*-trees (see Example 2.1). Note that a negative subgoal will never be an ancestor subgoal.
2. To handle a ground negative subgoal $L_1 = \neg A$, only a partial subsidiary SLTNF*-tree $T_{\leftarrow A}$ is generated by stopping at the first success leaf (see item 2b). The reason for this is that it is totally unnecessary to exhaust the remaining branches of $T_{\leftarrow A}$ because they would have no new answer for A . This can not only improve the efficiency of query evaluation, but also avoid some possible infinite derivations (see Example 2.2). In fact, Prolog achieves this by using cuts to skip the remaining branches of $T_{\leftarrow A}$ (e.g. see SICStus Prolog [21]).

For convenience, we use dotted edges “ $\cdots \triangleright$ ” to connect parent and child SLDNF*-trees, so that infinite derivations across SLDNF*-trees can be clearly identified. Moreover, we refer to T_{G_0} , the *top* SLDNF*-tree, along with all its descendant SLDNF*-trees as a *generalized SLDNF-tree* for $P \cup \{G_0\}$, denoted GT_{G_0} . Therefore, a path of a generalized SLDNF-tree may come across several SLDNF*-trees through dotted edges. Any such a path starting at the root node $N_0 : G_0$ is called a *generalized SLDNF-derivation*. A generalized SLDNF-derivation is *successful* (resp. *failed*) if it ends at a success leaf (resp. at a failure leaf).

Thus, there may occur two types of edges in a generalized SLDNF-tree, “ $\xrightarrow{C}$ ” and “ $\cdots \triangleright$ ”. For convenience, we use “ $\Rightarrow$ ” to refer to either of them. We also use $N_i : G_i \xrightarrow{C_1} \dots \xrightarrow{C_m} N_k : G_k$ to represent a segment of a generalized SLDNF-derivation, which generates $N_k : G_k$ from $N_i : G_i$ by applying the set of clauses $\{C_1, \dots, C_m\}$. Moreover, for any node $N_i : G_i$ we use L_i^1 to refer to the selected (i.e. left-most) subgoal in G_i .

Example 2.1 Let P_1 be a general logic program and G_0 a top goal, given by

$$\begin{array}{ll} P_1 : & p(X) \leftarrow \neg p(f(X)). \\ G_0 : & \leftarrow p(a). \end{array} \quad C_{p_1}$$

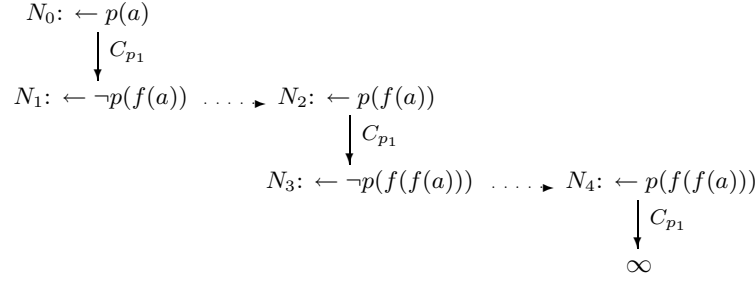


Figure 1: A generalized SLDNF-tree $GT_{\leftarrow p(a)}$.

The generalized SLDNF-tree $GT_{\leftarrow p(a)}$ for $P_1 \cup \{G_0\}$ is shown in Figure 1, where ∞ represents an infinite extension. We see that $GT_{\leftarrow p(a)}$ consists of one infinite generalized SLDNF-derivation.

Example 2.2 Consider the following general logic program and top goal.

$$\begin{array}{ll}
P_2 : & p \leftarrow \neg q. \\
& q. \\
& q \leftarrow q. \\
G_0 : & \leftarrow p.
\end{array}
\begin{array}{l}
C_{p_1} \\
C_{q_1} \\
C_{q_2}
\end{array}$$

The generalized SLDNF-tree $GT_{\leftarrow p}$ for $P_2 \cup \{G_0\}$ is depicted in Figure 2 (a). For the purpose of comparison, the SLDNF-trees for $P_2 \cup \{\leftarrow p\}$ are shown in Figure 2 (b). Note that Figure 2 (a) is finite, whereas Figure 2 (b) is not.

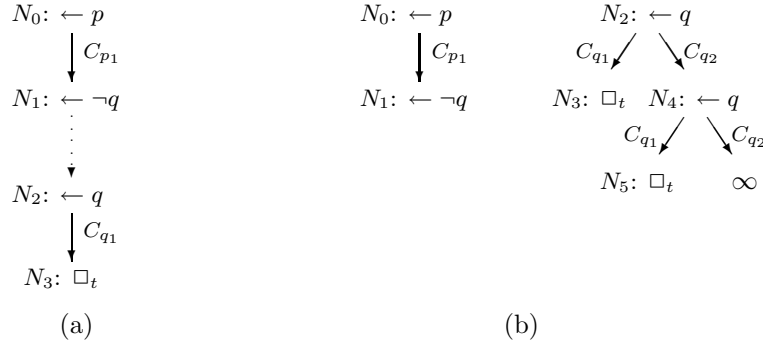


Figure 2: A generalized SLDNF-tree $GT_{\leftarrow p}$ (a) and its two corresponding SLDNF-trees (b).

We now formally define the ancestor-descendant relation.

Definition 2.2 Let $N_i : G_i$ and $N_k : G_k$ be two nodes in a generalized SLDNF-derivation, and A and B be the selected subgoals in G_i and G_k , respectively. We say that A is an *ancestor subgoal* of B , denoted $A \prec_{ANC} B$, if A is in the ancestor list AL_B of B . When A is an ancestor subgoal of B , we refer to B as a *descendant subgoal* of A , N_i as an *ancestor node* of N_k , and N_k as a *descendant node* of N_i .

3 Characterizing an Infinite Generalized SLDNF-Derivation

In this section we establish a necessary and sufficient condition for an infinite generalized SLDNF-derivation.

In [37], a concept of expanded variants is introduced, which captures some key structural characteristics of certain subgoals in an infinite SLD-derivation. We observe that it applies to general logic programs as well. That is, infinite generalized SLDNF-derivations can be characterized based on expanded variants.

Definition 3.1 Let A and A' be two atoms or functions. A' is said to be an *expanded variant* of A , denoted $A' \sqsupseteq_{EV} A$, if after variable renaming on A' it becomes B that is the same as A except that there may be some terms at certain positions in A each $A[i]...[k]$ of which grows in B into a function $B[i]...[k] = f(..., A[i]...[k], ...)$. Such terms like $A[i]...[k]$ in A are then called *growing terms* w.r.t. A' .

As an illustration, let $A = p(X, g(X))$ and $A' = p(Y, g(h(Y)))$. By renaming Y with X , A' becomes $B = p(X, g(h(X)))$, which is the same as A except that $B[2][1] = h(A[2][1])$. Therefore, A' is an expanded variant of A with a growing term $A[2][1]$. Here are a few more examples: $p(X, Y) \sqsupseteq_{EV} p(Z, W)$, $p(f(a)) \sqsupseteq_{EV} p(a)$, $p(g(a), f(g(h(X)))) \sqsupseteq_{EV} p(a, f(h(Y)))$, and $p([X_1, X_2, X_3]) \sqsupseteq_{EV} p([X_1, X_4])$ (note that $[X_1, X_2, X_3] = [X_1][X_2, X_3]$).

It is immediate from Definition 3.1 that variants are expanded variants with the same size.

Theorem 3.1 Let D be an infinite generalized SLDNF-derivation without infinitely large subgoals. Then there are infinitely many goals $G_{g_1}, G_{g_2}, \dots$ in D such that for any $j \geq 1$, $L_{g_j}^1 \prec_{ANC} L_{g_{j+1}}^1$ and $L_{g_j}^1$ and $L_{g_{j+1}}^1$ are variants.

Proof. Let D be of the form

$$N_0 : G_0 \Rightarrow N_1 : G_1 \Rightarrow \dots \Rightarrow N_i : G_i \Rightarrow N_{i+1} : G_{i+1} \Rightarrow \dots$$

For each derivation step $N_i : G_i \xrightarrow{C} N_{i+1} : G_{i+1}$, where L_i^1 is a positive subgoal and $C = A \leftarrow B_1, \dots, B_n$ such that $A\theta = L_i^1\theta$ under an mgu θ , we do the following:

1. If $n = 0$, which means L_i^1 is proved at this step, mark node N_i with $\#$.
2. Otherwise, the proof of L_i^1 needs the proof of $B_j\theta$ ($j = 1, \dots, n$). If all descendant nodes of N_i in D have been marked with $\#$, which means that all $B_j\theta$ have been proved at some steps in D , mark node N_i with $\#$.

Note that the root node N_0 will never be marked by $\#$, for otherwise G_0 would have been proved and D should have ended at a success leaf. After the above marking process, let D become

$$N_0 : G_0 \Rightarrow \dots \Rightarrow N_{i_1} : G_{i_1} \Rightarrow \dots \Rightarrow N_{i_2} : G_{i_2} \Rightarrow \dots \Rightarrow N_{i_k} : G_{i_k} \Rightarrow \dots$$

where all nodes except $N_0, N_{i_1}, N_{i_2}, \dots, N_{i_k}, \dots$ are marked with $\#$. Since we use the depth-first, left-most control strategy, for any $j \geq 0$ the proof of $L_{i_j}^1$ needs the proof of $L_{i_{j+1}}^1$ (let $i_0 = 0$), for otherwise N_{i_j} would have been marked with $\#$. That is, $L_{i_j}^1$ is an ancestor subgoal of $L_{i_{j+1}}^1$. Moreover, D must contain an infinite number of such nodes because if $N_{i_k} : G_{i_k}$ was the last one, which means that all nodes after N_{i_k} were marked with $\#$, then $L_{i_k}^1$ would be proved, so that N_{i_k} should be marked with $\#$, a contradiction.

The above proof shows that D has an infinite number of selected subgoals $L_{i_1}^1, L_{i_2}^1, \dots$ such that $L_{i_j}^1 \prec_{ANC} L_{i_{j+1}}^1$ ($j \geq 1$). Since all subgoals in D are bounded in size, and any general logic program has only a finite number of clauses and predicate, function and constant symbols, there must be an infinite number of subgoals $L_{g_1}^1, L_{g_2}^1, \dots$ among the $L_{i_j}^1$ s that are variants. This concludes the proof.

Theorem 3.2 *Let D be an infinite generalized SLDNF-derivation with infinitely large subgoals. Then there are infinitely many goals $G_{g_1}, G_{g_2}, \dots$ in D such that for any $j \geq 1$, $L_{g_j}^1 \prec_{ANC} L_{g_{j+1}}^1$ and $L_{g_{j+1}}^1 \supseteq_{EV} L_{g_j}^1$ with $|L_{g_{j+1}}^1| > |L_{g_j}^1|$.*

The following lemma is required to prove this theorem.

Lemma 3.3 *Let $S = \{C_1, \dots, C_n\}$ be a finite set of clauses. Let D be an infinite generalized SLDNF-derivation of the form*

$$N_0 : G_0 \Rightarrow \dots N_{i_1} : G_{i_1} \xrightarrow{C_{1_1}} \dots \xrightarrow{C_{1_{n_1}}} N_{i_2} : G_{i_2} \xrightarrow{C_{2_1}} \dots \xrightarrow{C_{2_{n_2}}} N_{i_3} : G_{i_3} \xrightarrow{C_{3_1}} \dots$$

where for any $j \geq 1$, $\{C_{j_1}, \dots, C_{j_{n_j}}\} = S$, $L_{i_j}^1 \prec_{ANC} L_{i_{j+1}}^1$, and $L_{i_j}^1$ is a variant of $L_{i_{j+1}}^1$ except for a few terms (at least one) at certain positions in $L_{i_{j+1}}^1$ that increase in size w.r.t. $L_{i_j}^1$. Then there are an infinite sequence of subgoals $L_{g_1}^1, L_{g_2}^1, \dots$ among the $L_{i_j}^1$ s such that for any $k \geq 1$, $L_{g_{k+1}}^1 \supseteq_{EV} L_{g_k}^1$ with $|L_{g_{k+1}}^1| > |L_{g_k}^1|$.

Proof. Since $L_{i_{j+1}}^1$ being an expanded variant of $L_{i_j}^1$ with $|L_{i_{j+1}}^1| > |L_{i_j}^1|$ is determined by those arguments of $L_{i_j}^1$ whose size increases w.r.t. $L_{i_{j+1}}^1$, for simplicity of presentation we ignore the remaining arguments of $L_{i_j}^1$ that are variants of the corresponding ones in $L_{i_{j+1}}^1$. Since the $L_{i_j}^1$ s are generated by repeatedly applying the same set S of clauses, the increase in their term size must be made in a fixed, regular way (assume that our programs contain no built-in's such as *assert(.)* and *retract(.)*). In order to facilitate the analysis of such regular increase in term size, with no loss in generality, let each $L_{i_j}^1$ be of the form $p([T_1^j, \dots, T_{m_j}^j])$, which contains a single argument that is a list, such that the list of $L_{i_{j+1}}^1$ is derived from the list $L = [T_1^j, \dots, T_{m_j}^j]$ of $L_{i_j}^1$ via a DELETE-ADD-SHUFFLE process which consists of *deleting* the first $0 \leq n^- \leq m_j$ elements from L , then *adding* $n^+ \geq n^-$ elements to the front of the remaining part of L , and finally *shuffling* the list of elements obtained (in a fixed way).²

Let $\vec{X}$ represent a sequence of elements, such as $X_1, X_2, \dots, X_m$. We distinguish the following two cases based on the ADD operation.

²See Example 4.4 for an illustration.

1. The n^+ added elements are independent of the list L of elements of $L_{i_j}^1$. Since the same set S of clauses is applied, the set E_1 of elements added to $L_{i_2}^1$ from $L_{i_1}^1$ must be the same as or a variant of the set added to $L_{i_3}^1$ from $L_{i_2}^1$ that must be the same as or a variant of the set added to $L_{i_4}^1$ from $L_{i_3}^1$, and so on. Let $E_2 \subseteq \{T_1^1, \dots, T_{m_1}^1\}$ be such that each $T \in E_2$ occurs in the derivation D infinite times. That is, no $T \in E_2$ will be removed by the DELETE operation. (But all $T \in \{T_1^1, \dots, T_{m_1}^1\} - E_2$ will be deleted at some derivation steps in D by the DELETE operation.) Then there must be an infinite sequence $L_{f_1}^1, L_{f_2}^1, \dots$ among the $L_{i_j}^1$ s such that for any $k \geq 1$, all elements in $L_{f_k}^1$ come from $E_1 \cup E_2$ (or its variant). Since $E_1 \cup E_2$ contains only a finite number of elements, no matter what shuffling approach is used, there must be an infinite sequence $L_{g_1}^1, L_{g_2}^1, \dots$ among the $L_{f_j}^1$ s such that for any $k \geq 1$, let $L_{g_k}^1 = p([S_1, \dots, S_n])$, then after variable renaming $L_{g_{k+1}}^1$ will become like $p([\vec{S}_1, \dots, \vec{S}_n])$ such that each S_l is in $\vec{S}_l$. Obviously, these S_l s in $L_{g_k}^1$ are growing terms w.r.t. $L_{g_{k+1}}^1$. That is, $L_{g_{k+1}}^1 \supseteq_{EV} L_{g_k}^1$ with $|L_{g_{k+1}}^1| > |L_{g_k}^1|$.
2. Some of the n^+ added elements depend on the list of $L_{i_j}^1$. For simplicity of presentation and without loss of generality assume that from $L_{i_1}^1$ to $L_{i_2}^1$ only one added element, say of the form $f(A_1^1, g(A_2^1))$, depends on the list $[T_1^1, \dots, T_{m_1}^1]$ of $L_{i_1}^1$. Let E_1 be the set of elements added to $L_{i_2}^1$ that are independent of the list $[T_1^1, \dots, T_{m_1}^1]$. That is, the set of added elements from $L_{i_1}^1$ to $L_{i_2}^1$ is $E_1 \cup \{f(A_1^1, g(A_2^1))\}$. Let $E = E_1 \cup \{T_1^1, \dots, T_{m_1}^1\}$. Then E can be considered to be the domain of the two arguments A_1^1, A_2^1 in $f(A_1^1, g(A_2^1))$, i.e. $A_1^1, A_2^1 \in E$. Since all the $L_{i_j}^1$ s in the derivation D are generated recursively by applying the same set S of clauses, for any $j \geq 1$ from $L_{i_j}^1$ to $L_{i_{j+1}}^1$ the set of added elements should be $E_1 \cup \{f(A_1^j, g(A_2^j))\}$ where $A_1^j, A_2^j \in E \cup \{f(A_1^k, g(A_2^k)) | k < j\}$. It is easy to see that any element of $L_{i_j}^1$ with an infinitely large size must be of the form $f(A_1^\infty, g(A_2^\infty))$ where A_1^∞ or A_2^∞ or both are of the form $f(A_1^\infty, g(A_2^\infty))$. We now consider the following two cases.
 - (a) No $L_{i_j}^1$ in D contains elements with an infinitely large size. Let N be the largest size of an element $f(-, g(-))$ in the $L_{i_j}^1$ s and let $E_2 = \{f(A_1^k, g(A_2^k)) | k \geq 1 \text{ such that } |f(A_1^k, g(A_2^k))| \leq N\}$. Obviously E_2 is finite. So the elements of any $L_{i_j}^1$ in D come from $E \cup E_2$. Since $E \cup E_2$ is finite, the number of the combinations of elements of $E \cup E_2$ is finite. Since the $L_{i_j}^1$ s in D grow towards an infinitely large size, some combinations must repeat in D infinite times. This suggests that no matter what shuffling approach is used, there must be an infinite sequence $L_{g_1}^1, L_{g_2}^1, \dots$ among the $L_{i_j}^1$ s such that for any $k \geq 1$, let $L_{g_k}^1 = p([S_1, \dots, S_n])$, then after variable renaming $L_{g_{k+1}}^1$ will become like $p([\vec{S}_1, \dots, \vec{S}_n])$ such that each S_l is in $\vec{S}_l$. These S_l s in $L_{g_k}^1$ are growing terms w.r.t. $L_{g_{k+1}}^1$, thus $L_{g_{k+1}}^1 \supseteq_{EV} L_{g_k}^1$ with $|L_{g_{k+1}}^1| > |L_{g_k}^1|$.
 - (b) As $j \rightarrow \infty$, some elements in $L_{i_j}^1$ grow towards an infinitely large size. Let T^{j+1} be an element in the list of $L_{i_{j+1}}^1$ that (as $j \rightarrow \infty$) grows towards an

element with an infinitely large size. Then there must be an element T^j in the list of $L_{i_j}^1$ that grows towards an element with an infinitely large size via T^{j+1} (otherwise, T^{j+1} would not grow towards an infinitely large element since we apply the same set S of clauses from $L_{i_{j+1}}^1$ to $L_{i_{j+2}}^1$ as from $L_{i_j}^1$ to $L_{i_{j+1}}^1$). This means that T^{j+1} is the same as (or a variant of) T^j or $T^{j+1} = f(A_1^j, g(A_2^j))$ such that T^j (or its variant) is in A_1^j or A_2^j . Obviously T^{j+1} is an expanded variant of T^j . Generalizing such argument, for each infinitely large element T_l^∞ in the list of $L_{i_\infty}^1$ we have an infinite sequence

$$T^1, T^2, \dots, T^j, T^{j+1}, \dots, T_l^\infty$$

with each T^j in the list of $L_{i_j}^1$ such that T^1 grows towards T_l^∞ via T^2 that grows towards T_l^∞ via T^3 , and so on. Obviously, for any $k > j \geq 1$ T^k is an expanded variant of T^j . So in this case each T^j is called a *growing element* w.r.t. T_l^∞ . Note that if there are more than one element in some $L_{i_j}^1$ that grow towards T_l^∞ via T^{j+1} , such as in the case $T^{j+1} = f(T_1^j, g(T_2^j))$ with T_1^j, T_2^j in $L_{i_j}^1$, only one T^j of them is selected as the growing element w.r.t. T_l^∞ based on the following criterion: T^j must be an expanded variant of T^{j-1} . If still more than one element meet such criterion, select an arbitrary one.

We now partition the list $[T_1^j, \dots, T_{m_j}^j]$ of each $L_{i_j}^1$ into two parts: the sublist GE_{i_j} of growing elements and the sublist NGE_{i_j} of non-growing elements. That is, $T \in [T_1^j, \dots, T_{m_j}^j]$ is in GE_{i_j} if it is a growing element w.r.t. some T_l^∞ . Clearly, for each $k > j \geq 1$ $|GE_{i_k}| \geq |GE_{i_j}|$. Since for any $V_1, \dots, V_m$ in GE_{i_j} there are m elements $V'_1, \dots, V'_m$ in GE_{i_k} such that each V'_l is an expanded variant of V_l , there must be an infinite sequence $L_{f_1}^1, L_{f_2}^1, \dots$ among the $L_{i_j}^1$ s such that for any $k > j \geq 1$ GE_{f_k} is an expanded variant of GE_{f_j} . That is, let $GE_{f_j} = [V_1, \dots, V_m]$, then after variable renaming GE_{f_k} becomes $[\vec{V}_1, \dots, \vec{V}_m]$ such that each $\vec{V}_l$ contains an element that is an expanded variant of V_l .

Now consider the elements of $L_{f_j}^1$ s. Since all infinitely large elements have been covered by the growing elements, the size of any non-growing element is bounded by some constant, say N . Let $E_2 = \{f(A_1^k, g(A_2^k)) | k \geq 1 \text{ such that } |f(A_1^k, g(A_2^k))| \leq N\}$. So all non-growing elements of any $L_{f_j}^1$ come from $E \cup E_2$. Since $E \cup E_2$ is finite and the sequence $L_{f_1}^1, L_{f_2}^1, \dots$ is infinite, some combinations of elements of $E \cup E_2$ must occur in infinitely many $L_{f_j}^1$ s. This implies that no matter what shuffling approach is used, there must be an infinite sequence $L_{g_1}^1, L_{g_2}^1, \dots$ among the $L_{f_j}^1$ s such that for any $k \geq 1$, let $L_{g_k}^1 = p([S_1, \dots, S_n])$, then after variable renaming $L_{g_{k+1}}^1$ will become like $p([\vec{S}_1, \dots, \vec{S}_n])$ such that each $\vec{S}_l$ contains an element that is an expanded variant of S_l . That is, $L_{g_{k+1}}^1 \supseteq_{EV} L_{g_k}^1$ with $|L_{g_{k+1}}^1| > |L_{g_k}^1|$.

Proof of Theorem 3.2. By the proof of Theorem 3.1, D contains an infinite number of selected subgoals $L_1^1, L_2^1, \dots$ such that $L_j^1 \prec_{ANC} L_{j+1}^1$ ($j \geq 1$). Since any

logic program has only a finite number of clauses, there must be a set of clauses in the program that are invoked an infinite number of times in D . Let $S = \{C_1, \dots, C_n\}$ be the set of all different clauses that are used an infinite number of times in D . Then D can be depicted as

$$N_0 : G_0 \Rightarrow \dots N_{i_1} : G_{i_1} \xrightarrow{C_{1_1}} \dots \xrightarrow{C_{1_{n_1}}} N_{i_2} : G_{i_2} \xrightarrow{C_{2_1}} \dots \xrightarrow{C_{2_{n_2}}} N_{i_3} : G_{i_3} \xrightarrow{C_{3_1}} \dots$$

where for any $j \geq 1$, $L_{i_j}^1 \prec_{ANC} L_{i_{j+1}}^1$ and $\{C_{j_1}, \dots, C_{j_{n_j}}\} = S$. Since any logic program has only a finite number of predicate, function and constant symbols and D contains subgoals with infinitely large size, there must be an infinite sequence $L_{f_1}^1, L_{f_2}^1 \dots$ among the $L_{i_j}^1$ s such that for any $l \geq 1$, $L_{f_l}^1$ is a variant of $L_{f_{l+1}}^1$ except for a few terms in $L_{f_{l+1}}^1$ that increase in size. Hence by Lemma 3.3, there is an infinite sequence $L_{g_1}^1, L_{g_2}^1 \dots$ among the $L_{f_l}^1$ s such that for any $k \geq 1$ $L_{g_{k+1}}^1 \supseteq_{EV} L_{g_k}^1$ with $|L_{g_{k+1}}^1| > |L_{g_k}^1|$.

Theorem 3.4 D is an infinite generalized SLDNF-derivation if and only if it is of the form

$$N_0 : G_0 \Rightarrow \dots N_{g_1} : G_{g_1} \xrightarrow{C_{1_1}} \dots \xrightarrow{C_{1_{n_1}}} N_{g_2} : G_{g_2} \xrightarrow{C_{2_1}} \dots \xrightarrow{C_{2_{n_2}}} N_{g_3} : G_{g_3} \xrightarrow{C_{3_1}} \dots$$

such that

1. For any $j \geq 1$, $L_{g_j}^1 \prec_{ANC} L_{g_{j+1}}^1$ and $L_{g_{j+1}}^1 \supseteq_{EV} L_{g_j}^1$.
2. For any $j \geq 1$ $|L_{g_j}^1| = |L_{g_{j+1}}^1|$, or for any $j \geq 1$ $|L_{g_j}^1| < |L_{g_{j+1}}^1|$.
3. For any $j \geq 1$, the set of clauses used to derive $L_{g_{j+1}}^1$ from $L_{g_j}^1$ is the same as that of deriving $L_{g_{j+2}}^1$ from $L_{g_{j+1}}^1$, i.e. $\{C_{j_1}, \dots, C_{j_{n_j}}\} = \{C_{(j+1)_1}, \dots, C_{(j+1)_{n_{j+1}}}\}$.

Proof. ($\Leftarrow$) Straightforward.

($\Rightarrow$) By Theorems 3.1 and 3.2, D is of the form

$$N_0 : G_0 \Rightarrow \dots \Rightarrow N_{i_1} : G_{i_1} \Rightarrow \dots \Rightarrow N_{i_2} : G_{i_2} \Rightarrow \dots$$

where for any $j \geq 1$, $L_{i_j}^1 \prec_{ANC} L_{i_{j+1}}^1$ and $L_{i_{j+1}}^1 \supseteq_{EV} L_{i_j}^1$. In particular, when all subgoals in D are bounded in size, by Theorem 3.1 for any $j \geq 1$ $|L_{i_j}^1| = |L_{i_{j+1}}^1|$. Otherwise, by Theorem 3.2 for any $j \geq 1$ $|L_{i_j}^1| < |L_{i_{j+1}}^1|$.

Since any logic program has only a finite number of clauses, there must be a set $S = \{C_1, \dots, C_n\}$ of clauses in the program that are invoked an infinite number of times in D . This means that there exists an infinite sequence of subgoals $L_{g_1}^1, L_{g_2}^1, \dots$ among the $L_{i_j}^1$ s such that for any $j \geq 1$ $L_{g_{j+1}}^1$ is derived from $L_{g_j}^1$ by applying the set S of clauses. That is, D is of the form

$$N_0 : G_0 \Rightarrow \dots N_{g_1} : G_{g_1} \xrightarrow{C_{1_1}} \dots \xrightarrow{C_{1_{n_1}}} N_{g_2} : G_{g_2} \xrightarrow{C_{2_1}} \dots \xrightarrow{C_{2_{n_2}}} N_{g_3} : G_{g_3} \xrightarrow{C_{3_1}} \dots$$

such that the three conditions of this theorem hold.

Theorem 3.4 is the principal result of this paper. It captures two crucial characteristics of an infinite generalized SLDNF-derivation: repetition of selected subgoals and clauses, and recursive increase in term size. Repetition leads to variants, whereas recursive increase introduces growing terms. It is the characterization of these key (dynamic) features that allows us to design a mechanism for automatically testing termination of general logic programs.

4 Testing Termination of General Logic Programs

4.1 Definition of Termination

In [12], a generic definition of termination of logic programs is presented.

Definition 4.1 Let P be a general logic program, S_Q a set of queries and S_R a set of selection rules. P is terminating w.r.t. S_Q and S_R if for each query Q_i in S_Q and for each selection rule R_j in S_R , all SLDNF-trees for $P \cup \{\leftarrow Q_i\}$ via R_j are finite.

Observe that the above definition considers finite SLDNF-trees for termination. That is, if P is terminating w.r.t. Q_i then all (complete) SLDNF-trees for $P \cup \{\leftarrow Q_i\}$ must be finite. This does not seem to apply to Prolog where there exist cases in which, although P is terminating w.r.t. Q_i and R_j , some (complete) SLDNF-trees for $P \cup \{\leftarrow Q_i\}$ are infinite. Example 2.2 gives such an illustration, where Prolog terminates with a positive answer.

In view of the above observation, we present the following definition based on a generalized SLDNF-tree.

Definition 4.2 Let P be a general logic program, S_Q a finite set of queries and R a fixed depth-first, left-most control strategy. P is terminating w.r.t. S_Q and R if for each query Q_i in S_Q , the generalized SLDNF-tree for $P \cup \{\leftarrow Q_i\}$ via R is finite.

The above definition implies that P is terminating w.r.t. S_Q and R if and only if there is no infinite generalized SLDNF-derivation in any generalized SLDNF-tree $GT_{\leftarrow Q_i}$. So the following result is immediate from Theorem 3.4.

Theorem 4.1 P is terminating w.r.t. S_Q and R if and only if for each query Q_i in S_Q there is no infinite generalized SLDNF-derivation in $GT_{\leftarrow Q_i}$ of the form

$$N_0 : G_0 \Rightarrow \dots N_{g_1} : G_{g_1} \xrightarrow{C_{1_1}} \dots \xrightarrow{C_{1_{n_1}}} N_{g_2} : G_{g_2} \xrightarrow{C_{2_1}} \dots \xrightarrow{C_{2_{n_2}}} N_{g_3} : G_{g_3} \xrightarrow{C_{3_1}} \dots$$

that meets the three conditions of Theorem 3.4.

4.2 An Algorithm for Automatically Testing Termination

Theorem 4.1 provides a necessary and sufficient condition for termination of a general logic program. Obviously, such a condition cannot be directly used for automatic verification because it requires generating an infinite generalized SLDNF-derivation to see if the three conditions of Theorem 3.4 are satisfied.

As we mentioned before, the three conditions of Theorem 3.4 capture two most important structural features of an infinite generalized SLDNF-derivation. Therefore, we may well use these conditions to predict possible infinite generalized SLDNF-derivations based on some finite generalized SLDNF-derivations. Although the predictions may not always be guaranteed to be correct (since the termination problem is undecidable in general), it can be correct in a vast majority of cases. That is, if the three conditions of Theorem 3.4 are satisfied by some finite generalized SLDNF-derivation, the underlying general logic program is most likely non-terminating. This leads to the following definition.

Definition 4.3 Let P be a general logic program, S_Q a finite set of queries and R a depth-first, left-most control strategy. Let $d > 1$ be a depth bound. P is said to be *most-likely* non-terminating w.r.t. S_Q and R if for some query Q_i in S_Q , there is a generalized SLDNF-derivation of the form

$$\begin{array}{c} N_0 : \leftarrow Q_i \Rightarrow \dots N_{g_1} : G_{g_1} \xrightarrow{C_{1_1}} \dots \xrightarrow{C_{1_{n_1}}} \\ N_{g_2} : G_{g_2} \xrightarrow{C_{2_1}} \dots \xrightarrow{C_{2_{n_2}}} \\ \vdots \\ N_{g_d} : G_{g_d} \xrightarrow{C_{d_1}} \dots \xrightarrow{C_{d_{n_d}}} N_{g_{d+1}} : G_{g_{d+1}} \end{array}$$

such that

1. For any $j \leq d$, $L_{g_j}^1 \prec_{ANC} L_{g_{j+1}}^1$ and $L_{g_{j+1}}^1 \supseteq_{EV} L_{g_j}^1$.
2. For any $j \leq d$ $|L_{g_j}^1| = |L_{g_{j+1}}^1|$, or for any $j \leq d$ $|L_{g_j}^1| < |L_{g_{j+1}}^1|$.
3. For any $j \leq d$, the set of clauses used to derive $L_{g_{j+1}}^1$ from $L_{g_j}^1$ is the same as that of deriving $L_{g_{j+2}}^1$ from $L_{g_{j+1}}^1$, i.e. $\{C_{j_1}, \dots, C_{j_{n_j}}\} = \{C_{(j+1)_1}, \dots, C_{(j+1)_{n_{j+1}}}\}$.

Theorem 4.2 Let P , S_Q and R be as defined in Definition 4.3.

1. If P is not terminating w.r.t. S_Q and R then it is *most-likely* non-terminating w.r.t. S_Q and R .
2. If P is not *most-likely* non-terminating w.r.t. S_Q and R then it is terminating w.r.t. S_Q and R .

Proof: 1. If P is not terminating w.r.t. S_Q and R , by Definition 4.2 for some query $Q_i \in S_Q$ there exists an infinite generalized SLDNF-derivation in $GT_{\leftarrow Q_i}$. The result is then immediate from Theorem 3.4.

2. If P is not most-likely non-terminating w.r.t. S_Q and R and, on the contrary, it is not terminating w.r.t. S_Q and R , then by the first part of this theorem we reach a contradiction.

It is easily seen that the converse of the above theorem does not hold. The following algorithm is to determine most-likely non-termination.

Algorithm 4.1 Testing termination of a general logic program.

- Input: A general logic program P , a finite set of queries $S_Q = \{Q_1, \dots, Q_m\}$, and a depth-first, left-most control strategy R .
- Output: *Yes* or a generalized SLDNF-derivation D .
- Method: Apply the following procedure.

```

procedure  $Test(P, S_Q, R)$ 
  begin
  1   For each query  $Q_i \in S_Q$ , construct the full generalized SLDNF-tree
       $GT_{\leftarrow Q_i}$  for  $P \cup \{\leftarrow Q_i\}$  via  $R$  unless a generalized SLDNF-derivation
       $D$  is encountered that meets the three conditions of Definition 4.3,
      in which case return  $D$  and stop the procedure;
  2   Return Yes
  end

```

Theorem 4.3 *Algorithm 4.1 terminates. It returns Yes if and only if P is not most-likely non-terminating w.r.t. S_Q and R .*

Proof: If for each query $Q_i \in S_Q$ the generalized SLDNF-tree $GT_{\leftarrow Q_i}$ for $P \cup \{\leftarrow Q_i\}$ is finite, line 1 of Algorithm 4.1 will be completed in finite time, so that Algorithm 4.1 will terminate in finite time. Otherwise, let all generalized SLDNF-trees $GT_{\leftarrow Q_i}$ with $i < m$ be finite and $GT_{\leftarrow Q_{i+1}}$ be infinite. Let D be the first infinite derivation in $GT_{\leftarrow Q_{i+1}}$. By Theorem 3.4, D must be of the form

$$N_0 : G_0 \Rightarrow \dots N_{g_1} : G_{g_1} \xrightarrow{C_{1_1}} \dots \xrightarrow{C_{1_{n_1}}} N_{g_2} : G_{g_2} \xrightarrow{C_{2_1}} \dots \xrightarrow{C_{2_{n_2}}} N_{g_3} : G_{g_3} \xrightarrow{C_{3_1}} \dots$$

such that the three conditions of Theorem 3.4 hold. Obviously, such an infinite derivation will be detected at the node $N_{g_{d+1}} : G_{g_{d+1}}$, thus Algorithm 4.1 will stop here.

When Algorithm 4.1 ends with an answer *Yes*, all generalized SLDNF-trees for all queries in S_Q must have been generated without encountering any derivation D that meets the three conditions of Definition 4.3. This shows that P is not most-likely non-terminating w.r.t. S_Q and R . Conversely, if P is not most-likely non-terminating w.r.t. S_Q and R , Algorithm 4.1 will not stop at line 1. It will proceed to line 2 with an answer *Yes* returned.

Theorem 4.4 *The following hold:*

1. *If Algorithm 4.1 returns Yes then P is terminating w.r.t. S_Q and R .*
2. *If P is not terminating w.r.t. S_Q and R then Algorithm 4.1 will return a generalized SLDNF-derivation D that meets the conditions of Definition 4.3.*

Proof: 1. By Theorem 4.3 Algorithm 4.1 returning *Yes* implies P is not most-likely non-terminating w.r.t. S_Q and R . The result then follows from Theorem 4.2.

2. By Theorem 4.2, when P is not terminating w.r.t. S_Q and R , it is most-likely non-terminating w.r.t. S_Q and R . So there exist generalized SLDNF-derivations in some generalized SLDNF-trees $GT_{\leftarrow Q_i}$ that meet the three conditions of Definition 4.3. Obviously, the first such derivation D will be captured at line 1 of Algorithm 4.1, which leads to an output D .

4.3 Examples

We use the following very representative examples to illustrate the effectiveness of our method. In the sequel, we choose the smallest depth bound $d = 2$.

Example 4.1 Applying Algorithm 4.1 to the logic program P_1 of Example 2.1 with a query $Q_1 = p(a)$ will return a generalized SLDNF-derivation D , which is the path from N_0 to N_4 in Figure 1. D is informative enough to suggest that P_1 is not terminating w.r.t. Q_1 .

Example 4.2 Applying Algorithm 4.1 to the logic program P_2 of Example 2.2 with a query $Q_1 = p$ will return an answer *Yes*. That is, P_2 is terminating w.r.t. Q_1 . However, for the query $Q_2 = q$ applying Algorithm 4.1 will return the following generalized SLDNF-derivation

$$N_0 : \leftarrow q \xrightarrow{C_{q_2}} N_1 : \leftarrow q \xrightarrow{C_{q_2}} N_2 : \leftarrow q$$

which strongly suggests that P_2 is not terminating w.r.t. Q_2 .

Example 4.3 Consider the following widely used program:³

$$\begin{array}{ll} P_3 : & \text{append}([], X, X). \\ & \text{append}([X|Y], U, [X|Z]) \leftarrow \text{append}(Y, U, Z). \end{array} \begin{array}{l} C_{a_1} \\ C_{a_2} \end{array}$$

Assume the following types of queries (borrowed from [12]):

³It represents a large class of well-known logic programs such as *member*, *subset*, *merge*, *quick-sort*, *reverse*, *permutation*, and so on.

$$\begin{aligned}
Q_1 &= \text{append}([1, 2], [3], L), \\
Q_2 &= \text{append}([1, 2], [3], [4]), \\
Q_3 &= \text{append}(L_1, L_2, [1, 2]), \\
Q_4 &= \text{append}(L_1, [1, 2], L_3), \\
Q_5 &= \text{append}(L_1, L_2, L_3), \\
Q_6 &= \text{append}([X|Y], [], Y), \\
Q_7 &= \text{append}([X|Y], Y, [Z|Y]).
\end{aligned}$$

The generalized SLDNF-trees $GT_{\leftarrow Q_1}$, $GT_{\leftarrow Q_2}$, and $GT_{\leftarrow Q_3}$ are all finite and contain no expanded variants in any derivations. So Algorithm 4.1 will return *Yes* when executing $\text{Test}(P_3, \{Q_1, Q_2, Q_3\}, R)$. That is, P_3 is terminating w.r.t. the first three types of queries.

When evaluating Q_4 , Algorithm 4.1 will return a generalized SLDNF-derivation as shown in Figure 3 (a). Note that all selected subgoals in the derivation are variants. Similar derivations will be returned when applying Algorithm 4.1 to Q_5 and Q_6 . Applying Algorithm 4.1 to Q_7 will yield a generalized SLDNF-derivation as shown in Figure 3 (b). Note that the selected subgoal at node N_3 is an expanded variant of the subgoal at N_2 that is an expanded variant of the subgoal at N_1 . That is, $\text{append}(Y_2, [X_1|[X_2|Y_2]], Y_2) \sqsupseteq_{EV} \text{append}(Y_1, [X_1|Y_1], Y_1) \sqsupseteq_{EV} \text{append}(Y, Y, Y)$.

It is clear that the derivations of Figures 3 (a) and (b) can be infinitely extended by repeatedly applying the clause C_{a_2} , thus P_3 is non-terminating w.r.t. the queries $Q_4 - Q_7$.

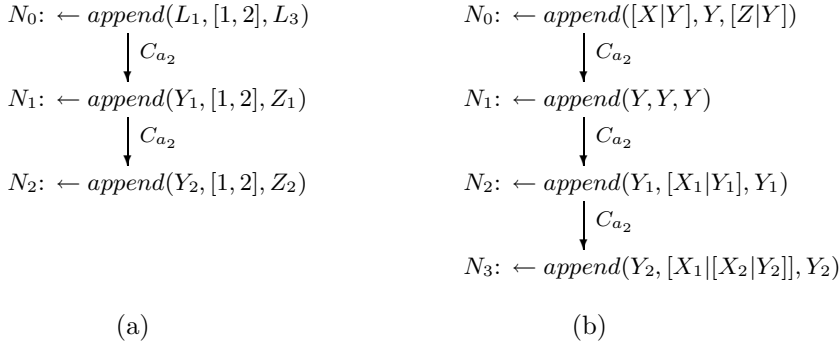


Figure 3: Two generalized SLDNF-derivations that satisfy the three conditions of Definition 4.3

Example 4.4 The following program illustrates how a list of terms grows recursively through a DELETE-ADD-SHUFFLE process.

$$\begin{array}{ll}
P_4 : & p([X_1, X_2|Y]) \leftarrow q([X_1, X_2|Y], Z), \text{reverse}(Z, [], Z_1), p(Z_1). & C_{p_1} \\
& q([X_1, X_2|Y], [X_3, f(X_1, X_2), X_2|Y]). & C_{q_1} \\
& \text{reverse}(Z, [], Z_1) \leftarrow Z_1 \text{ is the reversed list of } Z. & C_{rev}
\end{array}$$

Given a subgoal $p([X_1, X_2|Y])$, applying $C_{p_1}, C_{q_1}, C_{rev}$ successively will

DELETE X_1 , thus yielding a list $[X_2|Y]$,
 ADD X_3 and $f(X_1, X_2)$, thus yielding a list $[X_3, f(X_1, X_2), X_2|Y]$, and
 SHUFFLE the list $[X_3, f(X_1, X_2), X_2|Y]$ by reversing its components.

Note that the addition of X_3 is independent of the original list $[X_1, X_2|Y]$, but $f(X_1, X_2)$ is generated based on the list. This means that given a query of the form $p([T_1, \dots, T_m])$, a new variable X and a function $f(A_1^j, A_2^j)$ will be added each cycle $\{C_{p_1}, C_{q_1}, C_{rev}\}$ is applied, where the domain of A_1^j and A_2^j is the closure of the function $f(-, -)$ over $\{X, T_1, \dots, T_m\}$ (up to variable renaming). As an illustration, consider an arbitrary query $Q_1 = p([a, b])$. Applying Algorithm 4.1 to Q_1 will return a generalized SLDNF-derivation as shown in Figure 4, where for the selected subgoals L_{12}^1, L_6^1, L_0^1 at nodes N_{12}, N_6 and N_0 , we have $L_0^1 \prec_{ANC} L_6^1 \prec_{ANC} L_{12}^1$, $L_{12}^1 \supseteq_{EV} L_6^1 \supseteq_{EV} L_0^1$, and $|L_{12}^1| > |L_6^1| > |L_0^1|$. We see the following terms added due to the repeated applications of $\{C_{p_1}, C_{q_1}, C_{rev}\}$:

From N_0 to N_3	$X_1, f(a, b),$
N_3 to N_6	$X_2, f(b, f(a, b)),$
N_6 to N_9	$X_3, f(X_1, f(a, b)),$
N_9 to N_{12}	$X_4, f(X_2, f(b, f(a, b))).$

Apparently, the generalized SLDNF-derivation of Figure 4 can be infinitely extended. Thus P_4 is non-terminating w.r.t. Q_1 (and all queries of the form $p([T_1, \dots, T_m])$).

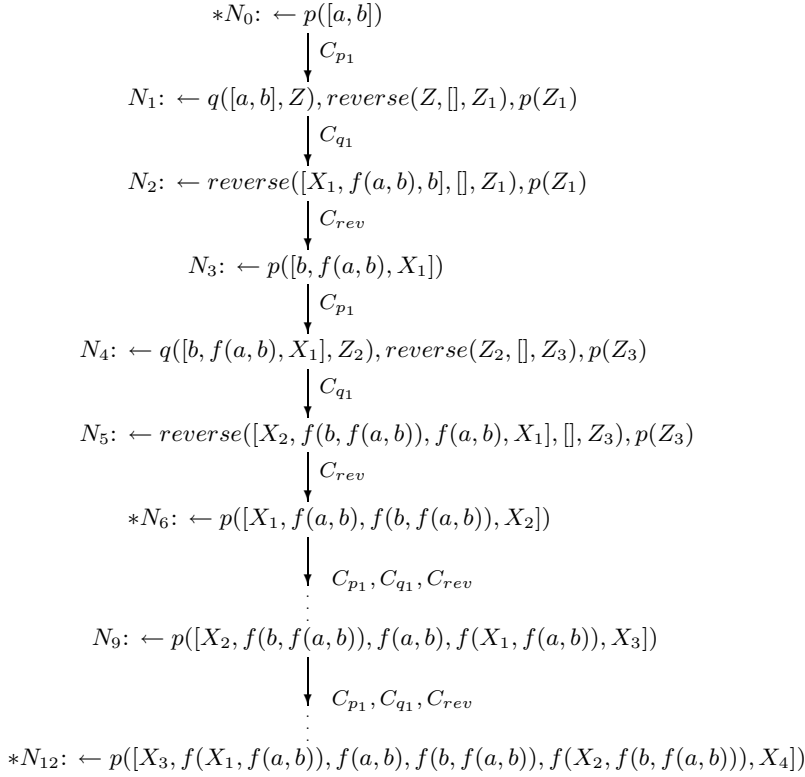


Figure 4: A generalized SLDNF-derivation for $P_4 \cup \{\leftarrow Q_1\}$

Example 4.5 ([1]) Consider the following well-known game program:

$$\begin{array}{ll}
P_5 : & \text{win}(X) \leftarrow \text{move}(X, Y). \neg \text{win}(Y). & C_{w_1} \\
& \text{move}(a, b) \leftarrow \text{for } (a, b) \in \mathcal{G} \text{ where } \mathcal{G} \text{ is an acyclic finite graph.} & C_{m_1}
\end{array}$$

Assume the following two types of queries:

$$\begin{array}{l}
Q_1 = \text{win}(a), \\
Q_2 = \text{win}(X).
\end{array}$$

Since $\mathcal{G}$ is an acyclic finite graph, no expanded variants occur in any generalized SLDNF-derivations. Therefore, Algorithm 4.1 will terminate for both Q_1 and Q_2 with an answer *Yes*. That is, P_5 is terminating w.r.t. $\{Q_1, Q_2\}$.

Example 4.6 ([1]) The following general logic program is used to compute the transitive closure of a graph.

$$\begin{array}{ll}
P_6 : & r(X, Y, E, V) \leftarrow \text{member}([X, Y], E). & C_{r_1} \\
& r(X, Z, E, V) \leftarrow \text{member}([X, Y], E), \neg \text{member}(Y, V), r(Y, Z, E, [Y|V]). & C_{r_2} \\
& \text{member}(X, [X|T]). & C_{m_1} \\
& \text{member}(X, [Y|T]) \leftarrow \text{member}(X, T). & C_{m_1}
\end{array}$$

Queries over this program are of the form $r(X, Y, e, [X])$ where X, Y are nodes and e is a graph specified by a finite list of its edges denoted by $[Node, Node]$. Such a query is supposed to succeed when $[X, Y]$ is in the transitive closure of e . The last argument of $r(X, Y, e, [X])$ acts as an accumulator in which a list of nodes is maintained which should not be reused when looking for a path connecting X with Y in e (to keep the search path acyclic). As an example, let $e = \{[[a, b], [b, c], [c, a]]\}$. We consider the following three types of queries:

$$\begin{array}{l}
Q_1 = r(a, c, e, [a]), \\
Q_2 = r(a, Y, e, [a]), \\
Q_3 = r(X, Y, e, [X]).
\end{array}$$

The generalized SLDNF-trees $GT_{\leftarrow Q_1}$, $GT_{\leftarrow Q_2}$, and $GT_{\leftarrow Q_3}$ are depicted in Figures 5, 6 and 7, respectively. Since there is no expanded variant in any generalized SLDNF-derivations, Algorithm 4.1 will return *Yes* when executing $Test(P_6, \{Q_1, Q_2, Q_3\}, R)$. That is, P_6 is terminating w.r.t. these three types of queries.

It is interesting to observe that for each of the above logic programs, $P_1 - P_6$, it is terminating if and only if applying Algorithm 4.1 to it yields an answer *Yes*. In fact, this is true for all representative logic programs we have currently collected in the literature. However, due to the undecidability of the termination problem, it is unavoidable that there exist cases in which Algorithm 4.1 returns a generalized SLDNF-derivation D , but P is a terminating logic program. We have created such a rarely used program.

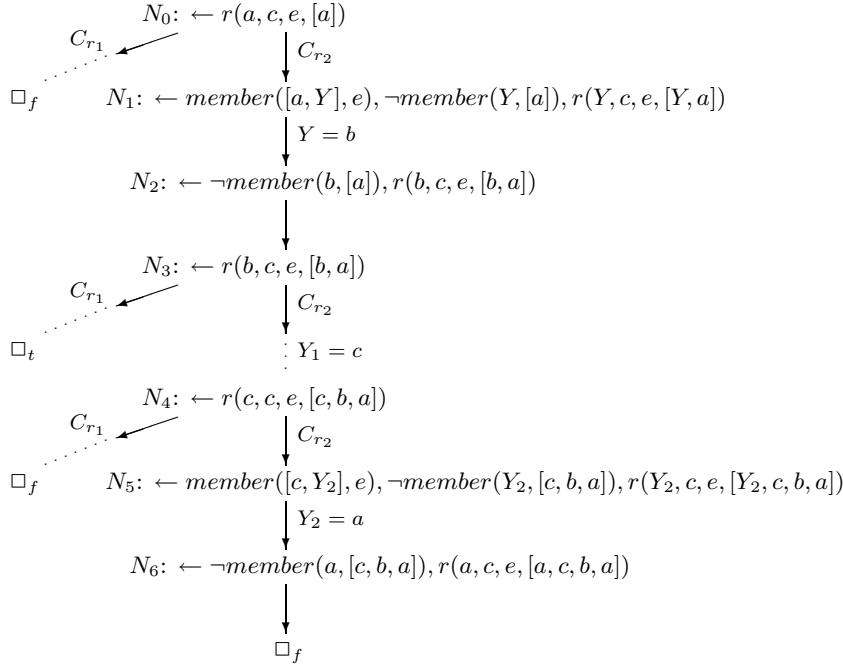


Figure 5: $GT_{\leftarrow Q_1}$ for $P_6 \cup \{\leftarrow Q_1\}$

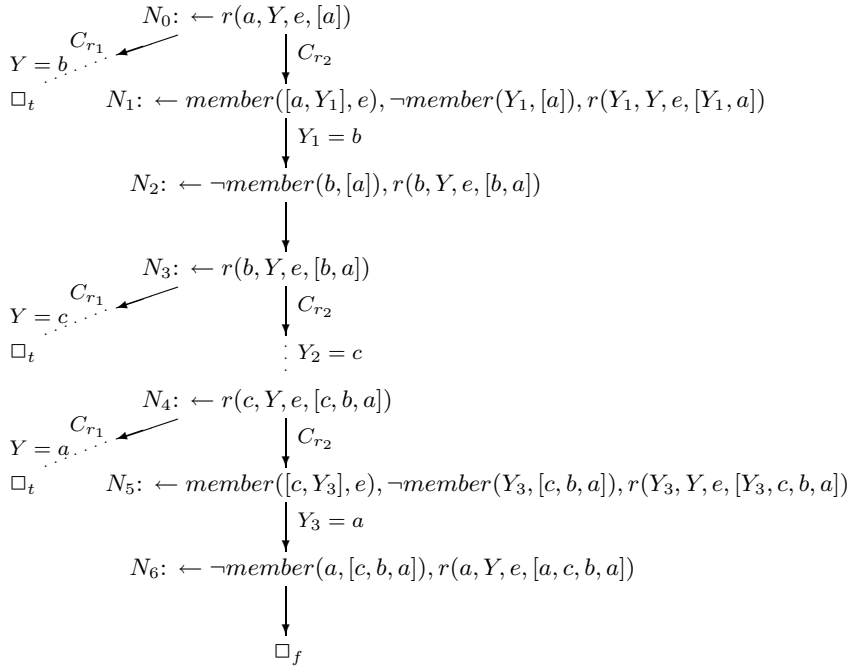


Figure 6: $GT_{\leftarrow Q_2}$ for $P_6 \cup \{\leftarrow Q_2\}$

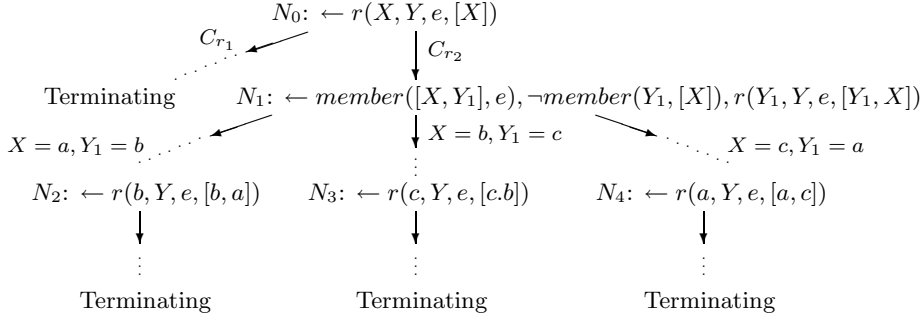


Figure 7: $GT_{\leftarrow Q_3}$ for $P_6 \cup \{\leftarrow Q_3\}$

Example 4.7 Consider the following logic program and top goal, where the function $size(Z)$ returns the number of elements in the list Z (e.g. $size([a, b]) = 2$).

$$\begin{aligned}
 P_7 : \quad & p([X|Y], N) \leftarrow size([X|Y]) < N, p([X, X|Y], N). & C_{p_1} \\
 G_0 : \quad & \leftarrow p([a], 100).
 \end{aligned}$$

The generalized SLDNF-tree GT_{G_0} for $P_7 \cup \{G_0\}$ is shown in Figure 8. It is easy to see that for any $i \geq 0$, the subgoal L_{2*i}^1 at N_{2*i} is an ancestor subgoal of the subgoal $L_{2*(i+1)}^1$ at $N_{2*(i+1)}$, while $L_{2*(i+1)}^1$ is an expanded variant of L_{2*i}^1 with $|L_{2*(i+1)}^1| > |L_{2*i}^1|$. P_7 is terminating w.r.t. the query $p([a], 100)$. However, applying Algorithm 4.1 (with $d = 2$) will return a generalized SLDNF-derivation D that is the segment between N_0 and N_4 in Figure 8. Apparently, in order for Algorithm 4.1 to return *Yes* the depth bound d should not be less than 100.

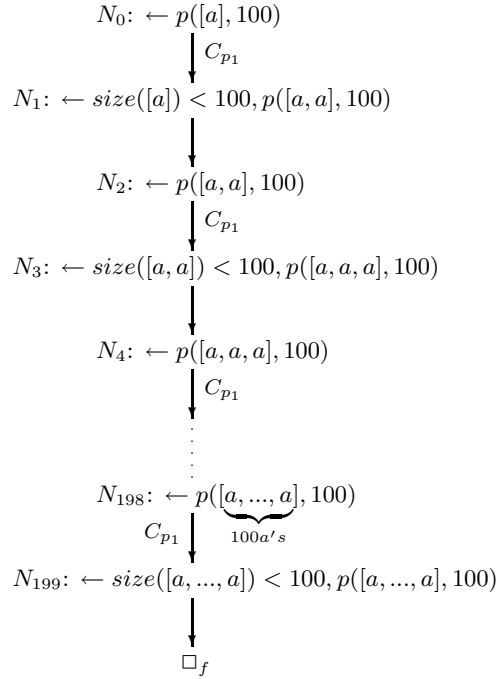


Figure 8: $GT_{\leftarrow p([a], 100)}$ for $P_7 \cup \{\leftarrow p([a], 100)\}$

5 Related Work

Our work is related to both termination analysis and loop checking.

5.1 Work on Termination Analysis

Concerning termination analysis, we refer the reader to the survey of Decorte, De Schreye and Vandecasteele [12, 15] for a comprehensive bibliography.

There are two essential differences between existing termination analysis techniques and ours. The first difference is that theirs are static approaches, whereas ours is a dynamic one. Static approaches only make use of the syntactic structure of the source code of a logic program to establish some well-founded conditions/constraints that, when satisfied, yield a termination proof. Since non-termination is caused by an infinite generalized SLDNF-derivation, which contains some essential dynamic characteristics (such as expanded variants and the repeated application of some clauses) that are hard to capture in a static way, static approaches appear to be less precise than a dynamic one. For example, it is difficult to apply a static approach to prove the termination of program P_2 in Example 2.2 with respect to a query pattern p . Moreover, although some static approaches (e.g., see [13, 30, 43, 45]) are automatizable, searching for an appropriate level mapping or computing some interargument relations could be very complex. For our approach, the major work is to identify expanded variants, which is easy to complete.

The second difference is that existing methods are suitable for termination analysis with respect to query patterns, whereas ours is for termination analysis with respect to concrete queries. The advantage of using query patterns is that if a logic program P is shown to be terminating with respect to a query pattern Q , it is terminating with respect to all instances of Q that could be an infinite set of concrete queries. However, if P is shown to be not terminating with respect to Q , which usually means that P is terminating with respect to some instances of Q but is not with respect to the others, we cannot apply existing termination analysis methods to make such a further distinction. In contrast, our method can make termination analysis for each single concrete query posed by the user and provide explanations about how non-termination happens. This turns out to be very useful in real programming practices. Observe that in developing a software in any computer languages we always apply some typical cases (i.e. concrete parameters as inputs) to test for the correctness or termination of the underlying programs, with an assumption that if the software works well with these typical cases, it would work well with all cases of practical interests.

From the above discussion, it is easy to see that our method plays a complementary role with respect to existing termination analysis approaches (i.e. static versus dynamic and query patterns versus concrete queries).

5.2 Work on Loop Checking

Loop checking is a run-time approach towards termination. It locates nodes at which SLD-derivations step into a loop and prunes them from SLD-trees. Informally, an SLD-derivation

$$N_0 : G_0 \Rightarrow N_1 : G_1 \Rightarrow \dots \Rightarrow N_i : G_i \Rightarrow \dots \Rightarrow N_k : G_k \Rightarrow \dots$$

is said to step into a loop at a node $N_k : G_k$ if there is a node $N_i : G_i$ ($0 \leq i < k$) in the derivation such that G_i and G_k are *sufficiently similar*. Many mechanisms related to loop checking have been presented in the literature (e.g. see [3, 8, 11, 20, 27, 26, 35, 36, 37, 40, 41, 44, 48]). We mention here a few representative ones.

Bol, Apt and Klop [3] introduced the *Equality check* and the *Subsumption check*. These loop checks can detect loops of the form

$$N_0 : G_0 \Rightarrow N_1 : G_1 \Rightarrow \dots \Rightarrow N_i : G_i \Rightarrow \dots \Rightarrow N_k : G_k$$

where either G_k is a variant or an instance of G_i (for the Equality check), i.e. $G_k = G_i\theta$ under a substitution θ , or G_i is included in G_k under a substitution θ (for the Subsumption check), i.e. $G_k \supseteq G_i\theta$. However, they cannot handle infinite SLD-derivations of the form

$$N_0 : p(X) \Rightarrow N_1 : p(f(X)) \Rightarrow \dots \Rightarrow N_i : p(f(\dots f(X)\dots)) \Rightarrow \dots$$

Sahlin [34, 35] introduced the *OS-check* (see also [4]). It determines infinite loops based on two parameters: a depth bound d and a size function *size*. Informally, OS-check says that an SLD-derivation may go into an infinite loop if it generates an oversized subgoal. A subgoal A is said to be *oversized* if it has d ancestor subgoals in the SLD-derivation that have the same predicate symbol as A and whose size is smaller than or equal to A .

Bruynooghe, De schreye and Martens [8, 26, 27] presented a framework for partial deduction with finite unfolding that, when applied to loop checking, is very similar to OS-check. That is, it mainly relies on term sizes of (selected) subgoals and a depth bound. See [4, 26] for a detailed comparison of these works.

OS-check (similarly the method of Bruynooghe, De schreye and Martens) is *complete* in the sense that it cuts all infinite loops. However, because it merely takes the number of repeated predicate symbols and the size of subgoals as its decision parameters, without referring to the informative internal structure of the subgoals, the underlying decision is fairly unreliable; i.e. many non-loop derivations may be pruned unless the depth bound d is set sufficiently large.

Using expanded variants, in [37] we proposed a series of loop checks, called *VAF-checks* (for Variant Atoms loop checks for logic programs with Functions). These loop checks are complete and much more reliable than OS-check. However, they cannot deal with infinite recursions through negation like that in Figure 1.

The work of the current paper can partly be viewed as an extension of [37] from identifying infinite SLD-derivations to identifying infinite generalized SLDNF-derivations. It is worth noting that termination analysis is merely concerned with the

characterization and identification of infinite derivations, but loop checking is also concerned about how to prune infinite derivations. The latter work heavily relies on the semantics of a logic program, especially when an infinite recursion through negation occurs. Bol [4] discussed loop checking for locally stratified logic programs under the perfect model semantics [33].

6 Conclusions

We have presented a method of verifying termination of general logic programs with respect to concrete queries. A necessary and sufficient condition is established and an algorithm for automatic testing is developed. Unlike existing termination analysis approaches, our method does not need to search for a model or a level mapping, nor does it need to compute an interargument relation based on additional mode or type information. Instead, it detects infinite derivations by directly evaluating the set of queries of interest. As a result, some key dynamic features of a logic program can be extracted and employed to predict its termination. Such idea partly comes from loop checking. Therefore, the work of this paper bridges termination analysis with loop checking, the two problems which have been studied separately in the past despite their close technical relation with each other.

It is worth mentioning that the practical purpose of termination analysis is to assist users to write terminating programs. Our method exactly serves for this purpose. When Algorithm 4.1 outputs *Yes*, the logic program is terminating; otherwise it provides users with a generalized SLDNF-derivation of the form as shown in Figures 3 or 4. Such a derivation may most likely lead to an infinite derivation, thus users can improve their programs following the informative guidance. (In this sense, our method is quite like a *spelling* mechanism used in a word processing system, which always indicates most likely incorrect spellings.)

Due to the undecidability of the termination problem, there exist cases in which a logic program is terminating but Algorithm 4.1 would not say *Yes* unless the depth bound d is set sufficiently large (see Example 4.7). Although $d = 2$ works well for a vast majority of logic programs (see Examples 4.1 - 4.6), how to choose the depth bound in a general case then presents an interesting open problem.

Tabled logic programming is receiving increasing attention in the community of logic programming (e.g. see [5, 10, 38, 39, 42, 48, 49]). Verbaeten, De Schreye and K. Sagonas [47] recently exploited termination proofs for positive logic programs with tabling. For future research, we are going to extend the work of the current paper to deal with general logic programs with tabling.

Acknowledgements

We would like to thank Danny De Schreye for his constructive comments on our work and valuable suggestions for its improvement.

References

- [1] K. R. Apt and D. Pedreschi, Reasoning about termination of pure Prolog programs, *Information and Computation* 106:109-157 (1993).
- [2] M. Bezem, Characterizing termination of logic programs with level mapping, *Journal of Logic Programming* 15(1/2):79-98 (1992).
- [3] R. N. Bol, K. R. Apt and J. W. Klop, An analysis of loop checking mechanisms for logic programs, *Theoretical Computer Science* 86(1):35-79 (1991).
- [4] R. N. Bol, Loop checking and negation, *Journal of Logic Programming* 15:147-175 (1993).
- [5] R. N. Bol and L. Degerstedt, Tabulated resolution for the Well-Founded semantics. *Journal of Logic Programming* 34(2):67-109 (1998).
- [6] A. Bossi, N. Cocco and M. Fabris, Norms on terms and their use in proving universal termination of a logic program, *Theoretical Computer Science* 124:297-328 (1994).
- [7] A. Brodsky and Y. Sagiv, Inference of inequality constraints in logic programs, in: *Proc. of the Tenth ACM SIGACT-SIGMOD-SIGART Symposium on Principles of Database Systems*, Denver, USA, ACM Press, 1991, pp. 227-240.
- [8] M. Bruynooghe, D. De Schreye and B. Martens, A general criterion for avoiding infinite unfolding during partial deduction, *New Generation Computing* 11(1):47-79 (1992).
- [9] D. Chan, Constructive negation based on the completed database, in: R. A. Kowalski and K. A. Bowen (eds.), *Proc. of the Fifth International Conference and Symposium on Logic Programming*, Seattle, USA, MIT Press, 1988, pp. 111-125.
- [10] W. D. Chen and D. S. Warren, Tabled evaluation with delaying for general logic programs, *J. ACM* 43(1):20-74 (1996).
- [11] M. A. Covington, Eliminating unwanted loops in Prolog, *SIGPLAN Notices* 20(1):20-26 (1985).
- [12] D. De Schreye and S. Decorte, Termination of logic programs: the never-ending story, *Journal of Logic Programming* 19/20:199-260 (1993).
- [13] D. De Schreye and K. Verschaetse, Deriving linear size relations for logic programs by abstract interpretation, *New Generation Computing* 13(2):117-154 (1995).

- [14] D. De Schreye and K. Verschaetse and M. Bruynooghe, A framework for analyzing the termination of definite logic programs with respect to call patterns, in: *Proc. of the International Conference on Fifth Generation Computer Systems*, Tokyo, Japan, IOS Press, 1992, pp. 481-488
- [15] S. Decorte, D. De Schreye and H. Vandecasteele, Constraint-based termination analysis of logic programs, *ACM Transactions on Programming Languages and Systems* 21(6):1137-1195 (1999).
- [16] S. Decorte, D. De Schreye and M. Fabris, Automatic inference of norms: A missing link in automatic termination analysis, in: D. Miller (ed.), *Proc. of the 1993 International Symposium on Logic Programming*, Vancouver, Canada, MIT Press, 1993, pp. 420-436.
- [17] Y. Deville, *Logic Programming: Systematic Program Development*, Addison-Wesley, 1990.
- [18] W. Drabent, What is failure? An approach to constructive negation, *Acta Informatica* 32(1):27-59 (1995).
- [19] S. Etalle, A. Bossi and N. Cocco, Termination of well-moded programs, *Journal of Logic Programming* 38(2):243-257 (1999).
- [20] F. Ferrucci, G. Pacini and M. Sessa, Redundancy elimination and loop checks for logic programs, *Information and Computation* 119:137-153 (1995).
- [21] Intelligent Systems Laboratory,
Swedish Institute of Computer Science, *SICStus Prolog User's Manual*, 1998.
Available from http://www.sics.se/sicstus/docs/3.7.1/html/sicstus_toc.html.
- [22] M. Krishna Rao, D. Kapur and R. Shyamasundar, Transformational methodology for proving termination of logic programs, *Journal of Logic Programming* 34(1):1-42 (1998).
- [23] N. Lindenstrauss and Y. Sagiv, Automatic termination analysis of logic programs, in: L. Naish (ed.) *Proc. of the Fourteenth International Conference on Logic Programming*, Leuven, Belgium. MIT Press, 1997, pp. 63-77.
- [24] J. Y. Liu, L., Adams, and W. Chen, Constructive negation under the well-founded semantics, *Journal of Logic Programming* 38(3):295-330 (1999).
- [25] J. W. Lloyd, *Foundations of Logic Programming*, 2nd ed., Springer-Verlag, Berlin, 1987.
- [26] B. Martens and D. De Schreye, Automatic finite unfolding using well-founded measures, *Journal of Logic Programming* 28(2):89-146 (1996).

- [27] B. Martens, D. De Schreye and M. Bruynooghe, Sound and complete partial deduction with unfolding based on well-founded measures, in: *Proc. of the International Conference on Fifth Generation Computer Systems*, Tokyo, Japan, IOS Press, 1992, pp. 473-480.
- [28] J. C. Martin, A. King and P. Soper, Typed norms for typed logic programs, in: J. P. Gallagher (ed.), *Proc. of the 6th International Workshop on Logic Programming Synthesis and Transformation*, Stockholm, Sweden, Springer, 1997, pp. 224-238.
- [29] F. Mesnard, Inferring left-terminating classes of queries for constraint logic programs, in: J. M. Maher (ed.), *Proc. of the 1996 Joint International Conference and Symposium on Logic Programming*, Bonn, Germany, MIT Press, 1996, pp. 7-21.
- [30] L. Plümer, Termination proofs for logic programs based on predicate inequalities, in: D. H. D. Warren and P. Szeredi (eds.), *Proceedings of the Seventh International Conference on Logic Programming*, MIT Press, Cambridge, MA, 1990, pp. 634-648.
- [31] L. Plümer, *Termination Proofs for Logic Programs*, Lecture Notes in Computer Science 446, Springer, 1990.
- [32] T. Przymusunski, On constructive negation in logic programming, in: E. L. Lusk and R. A. Overbeek (eds.), *Proc. of the North American Conference on Logic Programming*, Ohi, USA, MIT Press, 1989, page (Addendum to the Volume).
- [33] T. Przymusunski, On the declarative semantics of deductive databases and logic programs, in: J. Minker (ed.), *Foundations of Deductive Databases and Logic Programming*, Morgan Kaufmann, Los Altos, CA, 1988, pp. 193-216.
- [34] D. Sahlin, The mixtus approach to automatic partial evaluation of full Prolog, in: S. Debray and M. Hermenegildo (eds.), *Proc. of the 1990 North American Conference on Logic Programming*, MIT Press, Cambridge, MA, 1990, pp.377-398.
- [35] D. Sahlin, Mixtus: an automatic partial evaluator for full Prolog, *New Generation Computing* 12(1):7-51 (1993).
- [36] Y. D. Shen, An extended variant of atoms loop check for positive logic programs, *New Generation Computing* 15(2):187-204 (1997).
- [37] Y. D. Shen, L. Y. Yuan and J. H. You, Loop checks for logic programs with functions, *Theoretical Computer Science*, to appear. Available at <http://www.cs.ualberta.ca/~ydshen>.

- [38] Y. D. Shen, L. Y. Yuan and J. H. You and N. F. Zhou, Linear tabulated resolution for the well founded semantics, in: M. Gelfond, N. Leone and G. Pfeifer (eds.), *Proc. of the 5th International Conference on Logic Programming and Nonmonotonic Reasoning*, Springer, Berlin, 1999, pp. 192-205.
- [39] Y. D. Shen, L. Y. Yuan, J. H. You and N. F. Zhou, Linear tabulated resolution based on Prolog control strategy, *Theory and Practice of Logic Programming*, to appear. Available at <http://www.cs.ualberta.ca/~ydshen>.
- [40] D. Skordev, An abstract approach to some loop detection problems, *Fundamenta Informaticae* 31:195-212 (1997).
- [41] D. Smith, M. Genesereth and M. Ginsberg, Controlling recursive inference, *Artificial Intelligence* 30:343-389 (1986).
- [42] H. Tamaki and T. Sato, OLD resolution with tabulation, in: E. Shapiro (ed.), *Proceedings of the Third International Conference on Logic Programming*, pp. 84-98, Springer, Berlin, 1986.
- [43] J. D. Ullman and A. Van Gelder, Efficient tests for top-down termination of logical rules, *J. ACM* 35(2):345-373 (1988).
- [44] A. Van Gelder, Efficient loop detection in Prolog, *Journal of Logic Programming* 4:23-31 (1987).
- [45] K. Verschaeetse and D. De Schreye, Deriving termination proofs for logic programs, using abstract procedures, in: K. Furukawa (ed.), *Proceedings of the Eighth International Conference on Logic Programming*, MIT Press, Cambridge, MA, 1991, pp. 301-315.
- [46] K. Verschaeetse, Static termination analysis for definite Horn Clause programs, Ph.D. Thesis, Department of Computer Science, K. U. Leuven. Available at <http://www.cs.kuleuven.ac.be/~lpai>.
- [47] S. Verbaeten, D. De Schreye and K. Sagonas, Termination proofs for logic programs with tabling, submitted for publication, 2000.
- [48] L. Vieille, Recursive query processing: the power of logic, *Theoretical Computer Science* 69:1-53 (1989).
- [49] D. S. Warren, Memoing for logic programs, *CACM* 35(3):93-111 (1992).